

SP30

3" DISCHARGE SUBMERSIBLE WATER PUMP

500 GPM

- 21 lbs

The SP30 compact submersible pump is a light weight, efficient way to move large volumes of liquids quickly.

This submersible centrifugal design requires no priming and can run dry all day without damage. Direct drive requires no maintenance as all moving parts are self lubricated with passing hydraulic fluid. A semi closed designed stainless steel impeller will not corrode and will draw down water to a depth of only 3 inches.


The SP30 is fitted with flush face coupler that threads directly into SAE ports, No NPT hydraulic joints to weep. The SP30 Water Pump comes with a 3" female NPT output port fitted with a 3" Cam Loc fitting standard.



HDI

SP30

3" DISCHARGE SUBMERSIBLE WATER PUMP

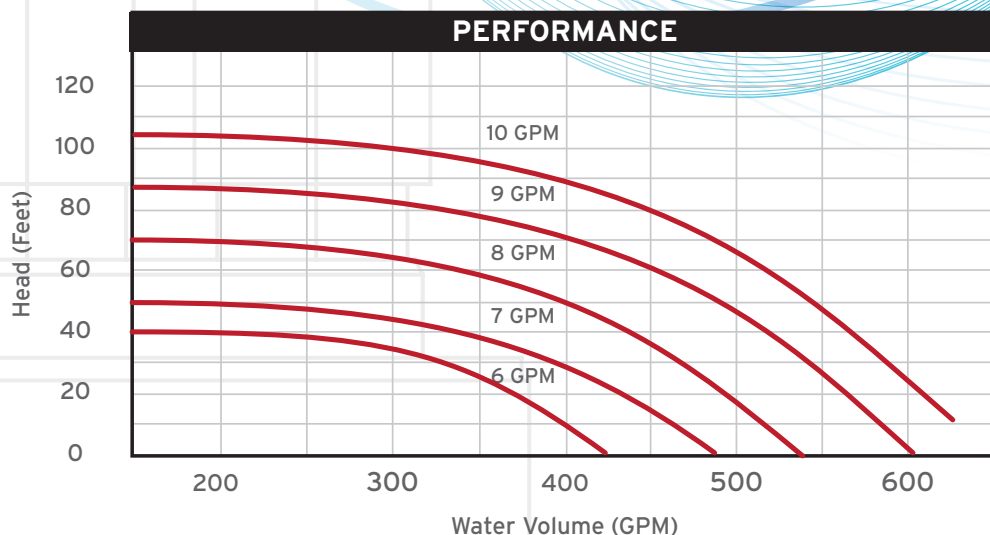

Testing was done in a controlled environment with a fixed discharge assembly using regulated pressures and flows. Results could vary in field conditions.

SP30 3" SUBMERSIBLE WATER PUMP SPECIFICATIONS

PUMPING CAPACITY	500 gpm (1893 lpm)
PUMP TYPE	Water
CONSTRUCTION	Aluminum Body/Stainless Impeller
DISCHARGE	3" Cam Loc - 3" NPT Female
WEIGHT	21 lbs. (9.5 kg)
LENGTH	12 inches (305 mm)
WIDTH	10 inches (254 mm)
HEIGHT	12 inches (305 mm)
HYDRAULIC FLOW RANGE	7-11 gpm (26-42 lpm)
MAXIMUM PRESSURE	2000 psi (138 bar)
MAXIMUM BACK PRESSURE	250 psi (17 bar)

WARRANTY - Submersible Pumps and their associated parts are warranted against defects in material and workmanship for a period of twelve months from the date of purchase. Repair or replacement of defective parts will be approved by manufacturer. This warranty becomes void if maximum pressures or flows are exceeded. Backpressure should be measured at the tool before being used. Excessive backpressure will damage shaft seal.

Assembled and Tested
in USA using Global Materials

Please
Read the
Manual



HDI
PO Box 1671
Gresham OR 97030

pumps@hdi-inc.com
206 247 4855 (FAX)

