

TP40

4" DISCHARGE SUBMERSIBLE TRASH PUMP

875 GPM - 59 lbs

The TP40 compact submersible trash pump is a light weight, efficient way to move large volumes of liquids that can contain sand, dirt and gravel very quickly.

This submersible centrifugal design requires no priming and can run dry all day without damage. Direct drive requires no maintenance as all moving parts are self lubricated with passing hydraulic fluid. A durable steel bowl and ductile iron impeller are very durable and capable of moving liquids containing up to 30% solids. If you are pumping oily sludge, septic systems, muddy trenches or even clean water this a pump for you.


The TP40 is fitted with flush face couplers that threads directly into SAE ports, No NPT hydraulic joints to weep. The TP40 Trash Pump comes with a 4 "male NPT output port fitted to a 4" Cam Loc fitting standard.



HDI

TP40

4" DISCHARGE SUBMERSIBLE TRASH PUMP

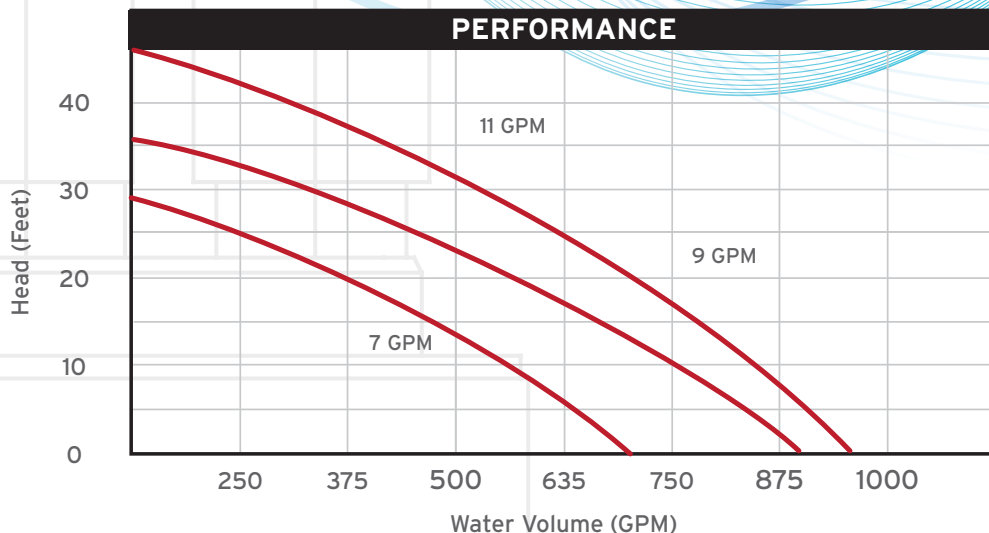

Testing was done in a controlled environment with a fixed discharge assembly using regulated pressures and flows. Results could vary in field conditions.

TP40 4" SUBMERSIBLE TRASH PUMP SPECIFICATIONS

PUMPING CAPACITY	875 gpm (3312 lpm)
PUMP TYPE	Trash-Sludge-Slurry-Water
CONSTRUCTION	Steel Fabrication/Iron Impeller
DISCHARGE	4" Cam Loc - 3" NPT Male
WEIGHT	59 lbs. (26.8 kg)
LENGTH	19 inches (482 mm)
WIDTH	15 inches (381 mm)
HEIGHT	19 inches (482 mm)
HYDRAULIC FLOW RANGE	7-9 gpm (26-34 lpm)
MAXIMUM PRESSURE	2000 psi (138 bar)
MAXIMUM BACK PRESSURE	250 psi (17 bar)

WARRANTY - Submersible Pumps and their associated parts are warranted against defects in material and workmanship for a period of twelve months from the date of purchase. Repair or replacement of defective parts will be approved by manufacturer. This warranty becomes void if maximum pressures or flows are exceeded. Backpressure should be measured at the tool before being used. Excessive backpressure will damage shaft seal.

Assembled and Tested
in USA using Global Materials

Please
Read the
Manual



HDI
PO Box 1671
Gresham OR 97030

pumps@hdi-inc.com
206 247 4855 (FAX)

